

Rite-Temp<sup>®</sup> valve trim with lever handle K-TS14423-4

### Features

- Includes faceplate with handle
- A single handle controls both on/off activation and temperature setting
- Complements Purist faucets and accessories

### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

## Installation

Trim only; requires valve to complete installation (sold separately)

## **Required Products/Accessories**

K-8304 Series Rite-Temp ${\ensuremath{\mathbb R}}$  Valve & Cartridge Kits or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

### or

K-2971-KS 3/4" Pressure-balancing Valve

### Recommended Products/Accessories K-23723 Faucet cleaner

### **Optional Products/Accessories**

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies





# **Codes/Standards**

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	RGD	Vibrant Rose Gold
	VHR	



# **KOHLER**, Faucets

Rite-Temp® valve trim with lever handle K-TS14423-4

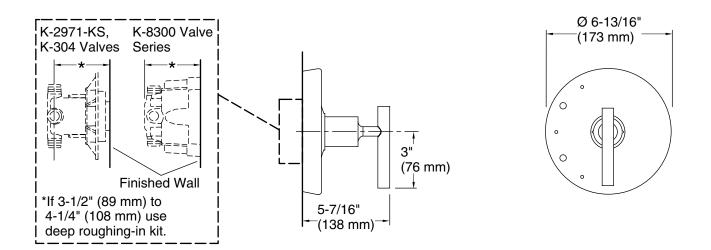

### **Technical Information**

All product dimensions are nominal.

### Showerhead/Body Spray:

2.5 gal/min (9.5 l/min) Rated maximum flow:

### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



# **Purist**®