

Underscore® Rectangle

5' Bath **K-1957-LA**

Features

- Integral flange.
- Left drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- Integral apron.
- Above-the-floor drain installation.
- Textured bottom surface.
- 60" (1524 mm) x 32" (813 mm) x 21" (533 mm).

Material

Acrylic.

Installation

Alcove.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain K-7272 PVC Slotted Overflow Bath Drain



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™








Underscore® Rectangle


5' Bath **K-1957-LA**

No change in measurements if connected with drain illustrated. (K-7272)







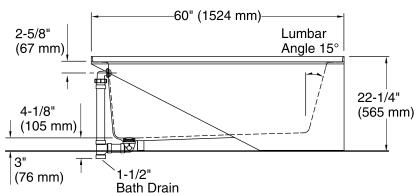

Technical Information

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Left

Basin area, bottom: 46-1/4" x 22" (1175 mm x 559 mm)
Basin area, top: 52" x 24" (1321 mm x 610 mm)

 Weight:
 105 lbs (47.6 kg)

 Minimum floor load:
 56 lbs/ft² (273.4 kg/m²)

 Water depth:
 15-1/2" (394 mm)

 Water capacity:
 68 gal (257.4 L)

 Minimum flat for door:
 2-3/4" (70 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

