
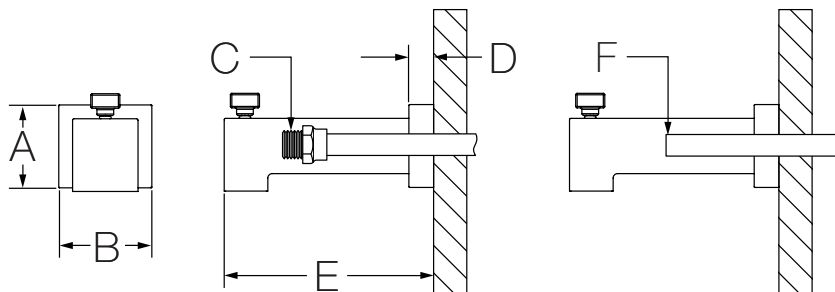




361DTS
Diverter Tub Spout
Specification Submittal

<p>Model Numbers</p> <p><input type="checkbox"/> 361DTS <i>Diverter Tub Spout</i></p> <p><input type="checkbox"/> 361DTS-SS <i>Diverter Slip Spout</i></p>	<p>Specification</p> <ul style="list-style-type: none"> • 5-5/8" length • Pull-up diverter • Thread on installation • Optional slip spout with 1/2" inlet • Metal construction plated in standard polished chrome finish
<p>Options/Modifications</p> <p><input type="checkbox"/> -BBZ <i>Brushed Bronze finish</i></p> <p><input type="checkbox"/> -MB <i>Matte Black finish</i></p> <p><input type="checkbox"/> -STN <i>Satin Nickel finish</i></p> <p>Note: Append appropriate -suffix to model number.</p>	<p>Compliance</p> <p>-ASME A112.18.1/CSA B125.1</p>  <p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>

Dimensions



Measurements	
A	2-1/4", 57 mm
B	2-1/2", 64 mm
C	Male 1/2-14 NPT fitting must protrude 3-7/8" (98 mm) from finished wall
D	5/8", 16 mm
E	5-5/8", 143 mm
F	1/2" rigid copper tubing must protrude Min. 1-3/4" (44 mm) Max. 2-3/4" (70 mm) from finished wall

Note: Dimensions subject to change without notice.